









SHUMATI

SPANIST

0445110024 Injector CRI1-13 Technical File

SPREAT

Stand
1.0445110024 Injector's Introduction
1.1. 0445110024 Injector's Basic Information
1.2. 0445110024 Injector's Common Part Number
1.3.0445110024 Injector's Matching Information
1.4.0445110024 Injector's Parameter
1.5.0445110024 Injector's Specifications and Dimensions
1.6. 0445110024 Injector's Quality Control
1.6. 0445110024 Injector's Quality Control
1.8.0445110024 Injector's Packing List and Package Size
1.9.0445110024 Injector's Testing Standard and Certificate
1.10.0445110024 Injector's Warranty Instructions   6     1.11.0445110024 Injector's Manufacturer   6     2.0445110024 Injector Technical Support   7
2.0445110024 Injector Technical Support
2.1.0445110024 Injector's Part Number Location
2.2.0445110024 Injector's Application Scenarios
2.3.0445110024 Injector's Installation
2.4. 0445110024 Injector 's Reasons for Not Working Normally
2.4. 0445110024 Injector 's Reasons for Not Working Normally
2.6.0445110024 Injector's Technical Support Obtaining Methods
3.0445110024 Injector's Purchase and Delivery
3.2.0445110024 Injector's Main Sales Markets9
3.1.0445110024 Injector's Purchase Payment Term93.2.0445110024 Injector's Main Sales Markets93.3.0445110024 Injector's Declaration Requirements9
3.4.0445110024 Injector's Shipping Ways
3.5.0445110024 Injector's Lead time
3.6.0445110024 Injector's Logistics Time for Destination Out of China's Areas
3.7.0445110024 Injector's Packing
4.0445110024 Injector's Storage Standard11
5. Company Information
5.1. Company Introduction
5.2. Sales-men's Contact Information
. 2011 - 2011 - 2011 - 2011 - 2011 - 2011 - 2011 - 2011 - 2011 - 2011 - 2011 - 2011 - 2011 - 2011 - 2011 - 201
SHARAL SHERAL SH
SANDALL ENTERAL ENTERAL ENTERAL ENTERAL ENTERAL ENTERAL ENTERLY ENTERLY ENTERLY ENTERLY ENTERLY ENTERLY ENTERLY ENTERLY ENTERLY

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

The The The Tree The

. and Ch

Tel: +8675523215133 Website : www.shumatt.com

- and the

and a state of the second seco

# 0445110024 Injector CRI1-13 Technical File

### 1.0445110024 Injector's Introduction

# 1.1. 0445110024 Injector's Basic Information

and Title and	China made new high quality diesel injector 0445110024 fuel injector CRI1-13
SKU 1	G1W20445110024
SKU 2	

### 1.2. 0445110024 Injector's Common Part Number

### (1) Injector's Exchange Information

St	Injector Part Number	Re-manufactured Part Number	. \$1. \$1.
in m	0 445 110 025	0 986 435 020	the the
Store Store	0 445 110 024	an and an an an	n den de

### (2) Injector's Application Information

Injector Part	MERCEDES-BENZ Car			
Number	Model			
0 445 110 025	611 070 06 87	and and an	in the t	and and
Stop. Stop. St	A 611 070 06 87	20. 34020 - 34020 -	Shipe Shipe Sh	Stores - 34
0 445 110 024	611 070 06 87			
- all and a grant of	A 611 070 06 87	The second second	A TON A TONY A	and a little of
SAT SAT SA	A 611 070 06 87 38	str str	SAL SAL SAL	344 344
See See	611 070 06 87 38	en de la	1 Dr. 1	in the
0 986 435 020	611 070 06 87		and and an	en al al
	611 070 06 87 0080			
all all all a	611 070 06 87 80		a state a state of	ant antit a
ên ês de	A 611 070 06 87 38	str str	su su su	\$200 \$200
at at	A 611 070 06 87 0080	~~ ~~ ~~	1	di di
Station States of	A 611 070 06 87 80	at a star	Straw Straw St	en de la de
	A 611 070 06 87			
. and . and .	611 070 06 87 38	and the state	· . and . and .	and a the a
Str. Str. St	- 31 31 31	37 37	- ST - ST - ST	1 - M M.

### (3) Injector's Part Number Common Writing

0445110025, 0445110024, 0986435020, 0445110025, 0445110024, 0986435020, 0445 110025, 0445110024, 0986435020, 0445110025, 0445110024, 0986435020, 0445110025, 0445110024, 0986435020, 0445110025, 0445110024, 0986435020, 0445110025, 0445 110024, 0986435020, 61107006870080, 611070068780, A 61107006870080, A 6110700687 80, 6110700687, A 611070068738, A 6110700687, 611070068738, 6110700687080, 611070068780, A 61107006870080, A 611070068780, 6110700687, A 611070068738, A 6110700687, 611070068738

### 1.3.0445110024 Injector's Matching Information

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

## **HUMFITT** Shenzhen Shumatt Technology Co., Ltd

Vehicle brand	Series	Car Model	Engine Model	Production date	Power (KW)	Horse power	Emission Standards	Manufacturer	Emissions (L)	Cylinder	Power Source (V)
MERCED ES-BENZ	Sprinter	311 CDI Sprinter	OM 611.981 DE LA	2000/04- 2006/05	80	109			2.1	4	12
MERCED ES-BENZ	Sprinter	308 CDI Sprinter	OM 611.987 D LA	2000/04- 2006/05	60	82			2.2	4	12

### 1.4.0445110024 Injector's Parameter

Adaptation System: Common Rail System Injector Series: 110 Series

Parameter Performance: CRI1-13

Matching Accessories: /

Injector Type: Electromagnetic Injector

Support System Maximum Pressure: 1350 Vehicle Configuration Information: MERCEDES-BENZ

### 1.5.0445110024 Injector's Specifications and Dimensions

Injector Size: 21.5cm\*4 cm \*4 cm = 344cm<sup>3</sup> (L\*W\*H=V) Injector Net Weight: 0.55kg Gross Weight: 0.6kg Injector Quality: China Made Brand New Package Size: 28cm\*7 cm \*7 cm = 1372 cm<sup>3</sup> Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

### 1.6. 0445110024 Injector's Quality Control

### (1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

### (2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque,

# (3) Injector Inspection

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

### 1.7. 0445110024 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering,

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

logo engraving, injector internal packaging, injector external packaging and labels customized, etc.

STRUTT			and a set and a set
SHORT	Safe Contraction of the	i fo	n
SALIDA			the state state state
	Injector nozzle engraving	Injector house lettering and QR code	Injector box and label

# (2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.

Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

A Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

10 C

1.00

### 1.8.0445110024 Injector's Packing List and Package Size

(1) Injector 9	Spare Parts List	N. THERE'S PRINT SHOULD	THEORY THEORY THEORY THE
No.	1	2	3
Shiftin Image <sup>rhifti</sup>	Shuman		sin <sup>o</sup> O <sup>lans</sup>
Name	Fuel Injector	O-Ring	Gasket F 00V C17 503
Description	Fuel injector part number: 0445110024	Ensure to meet the standard of the sealing performance between the injector and the engine	Made of brass, used to ensure the tight fit between the injector cap end and the engine
No.	4	5	6
Image			State of the state
all			578.57 538
Name	Nozzle Protective Cover Cap	Injector House Protective Cover Cap	Solenoid Valve Protective Cap
Description	Protect nozzle holes from being polluted and blocked	Protect oil inlet from being polluted and blocked	Protect the solenoid valve body and terminals from being damaged by external forces
No.	7	8	9
SAUDATI SAUDA Image SAUDATI SAUDA			
Name	VCI Anti-rust Bag	Bubble Bag	Injector Packing Box
Description	Prevent fuel injector from rusting	Prevent the injector from being damaged by external forces	Place injector and injector accessories

▲ Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.

O-ring and gasket are disposable installation accessories, and need to be replaced for

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com 


### re-installation.

▲ The nozzle protective cover, the injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused.

VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

▲ The injector and the installation parts should be coated with appropriate sealing oil during installation.

### (2) Injector Box Size

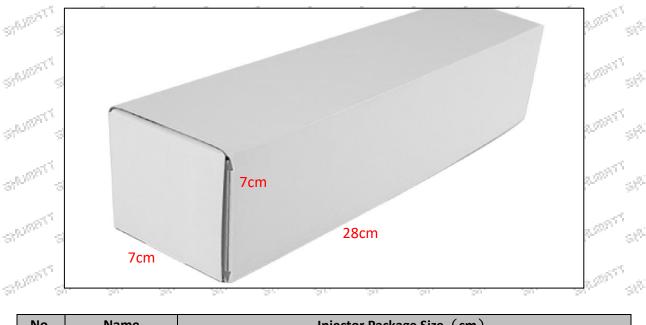

	NO.	Name		Inject	or Package Size	(cm)				
-97	ີ 1 ິ	Injector Box	 Score.	Stor.	28*7*7	Store	Stor.	See.	- 38	1

### 1.9.0445110024 Injector's Testing Standard and Certificate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

BOTEN	测试报告	4.05.2019 10:42:09	- 1991	\$1 <sup>2,000</sup>	Stores.	\$10,000 ·	S10,000.	210,200	Stran.	Stora.	
\$# <u>企业:</u>			÷.	× .	а	а	а .		a .	a	20
NZ:	18は:			ST STRUMENT	T SPLITT	T SPLITTE	ri SAUTORI	ri SPANA	T SPERIO	C SHERRY	2.7
)唐: (今日記:	松潤人:		2 - SL.	\$5°	-92	-97° -	90°	22	22.	97°	
sið:	送检单位。										
a.	客户姓名:		- 5	TT STRUMENT	S at	SHIDE	T SPLORT	570000	T SALON	T SRADA	$\mathcal{O}$
·萨说述:			- 19. <sup>576</sup>	1300	T SPECTOR		. Al 1997	- 13 ST	. A.S.	1. 19 Mar	
約名称: 動業家			344	194	201	201	201	.90	20	20	
晤-零件号:											
ikA:	2227			5 - A	r "a	i al	6 . "A	C. S.	C de	6 . <sub>16</sub> 9	52
E218079: 005003-6511	检测结果			578,5057	SPORT	R SPARE	" shuter	S. S	C SPLEE	T SPR. DET	
前年(6)洪伯 LEAN TEST: 12	1940628 R62K003	808-118 V					540 °	141° °	10 <sup>-1</sup>		
Factor se WYFRM se											
Mar 203	147.9±165 C3 218.9±144 C3	·····z···· V	578.505	STREET,	States.	C. SALIST	antan'	an and a start	SPARIE S	CI SPLEED	53
TL: 284 U.: HO	846±85 03 12.9±48 03	V	St.	- Starring	-SC-	- Charles	State -	- galler -	- Starrie	- Star	
VE: AP	45±18 03	-• ¥	_								
				a	a	a	a	d	6 - J	в	æ,
			STREETS	er Steller	STRUTT	r. Statute	STATON'	S. S	T SPLETT	SPL STAT	1.1
			2000	200	dilla.	Sta	Siller	Ster	22.00	255.00	
1leslesles 推修前推论后	x _ dī _ dā 法程序通过		-								
19 <sup>57</sup>	a <sup>rte</sup> . A		1977 - 1989	S . del	5 . dil	t sate	сі. 	а. 1997 — 1997	6 <sup>10</sup>	6	εŃ

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

### **1.10**.0445110024 Injector's Warranty Instructions

# (1) . Product Warranty Conditions and Instructions

SALORT SAUDAT 39.50 It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc. STRATT' Statist's SPRINT . SPATIST

(2) . Injector Warranty Coverage -03-55 Within 15 days after customer receives the 0445110024 injector, if there is a performance failure and de la compañía de la the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445110024 injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model A.S.S. 01<sup>,510</sup> or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the ALC . N THERE & product is confirmed to be fault-free.

Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 SPECTO SPECT SPR. FRI SPUTTE months from the date of repairing.

### (3) . Injector Out of Warranty Coverage

The warranty period has expired.

CERT C WERE S Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.  $e^{2}$ 

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).

Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system a Trans. Trans. . 18<sup>67</sup> fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine straw, straw, straw, straw, straw, straw, straw, - Star maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance -11<sup>50</sup> Stran. manual.

# 1.11.0445110024 Injector's Manufacturer

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com


- 18 M

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

### 2.0445110024 Injector Technical Support

# 2.1.0445110024 Injector's Part Number Location


## 1) E.g.: The injector part number see as follows



<i>"</i>	No.		a. 507	Name		- 0
STORES !	A	-ANTINA C	orand, log seri	go, part r es numb		( 
	B	30.	nozzle	part nur	nber	201

### 2.2.0445110024 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.

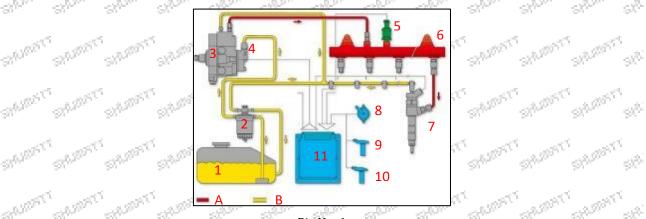

Pic No. 1

1 Tank 5 Common Rail Pressure Sensor 9 Engine Crankshaft Sensor A High Pressu Circuit   2 Diesel Filter 6 Common Rail Pipe 10 Camshaft Sensor B Low	re Oil
2 Diesel Filter 1 6 Common Bail Pine 1 10 Comshatt Sensor 1 B	:
2 Descrinter of common tail type 10 cansing sensor b Pressure Oil (	lircuit
3     High-Pressure Pump     7     Injector     11     ECU Electronic Control Unit	\$X.
4 Fuel Gear Pump 8 Accelerator Pedal	15

### 2.3.0445110024 Injector's Installation

(1) .0445110024 Injector's Installation Precautions:

▲ The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc. 10

Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring. , ship, ship, ship, ship, ship, ship, ship,

Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

▲ When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual. Lt is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

▲ It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

### **2.4**. 0445110024 Injector 's Reasons for Not Working Normally

(1) There is air in the oil circuit of the engine fuel system.
(2) Vahiala ail auror ail

(2) Vehicle oil pump oil supply system is not normal.

(3) Engine common rail system oil leakage or pressure limiting valve damage.

100 (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.

(5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

A Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

### 2.5. 0445110024 Injector 's Causes of Damage

S.F.S.T. MERTI (1) Didn't operate properly according to engine maintenance manual during disassembly or installation, n in resulting in damage to the injector. 55 di -

(2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.

(3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.

(4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.

Tel: +8675523215133 Website : www.shumatt.com

SHIDAL

(5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.

(6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.

(7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector. A.S.S.

(8) The injector will be damaged naturally at the end of its working life.

(9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly. Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

### 2.6.0445110024 Injector's Technical Support Obtaining Methods

(1) Injector Technical File, visit <u>http://shumatt.com</u> to get the technical file.

(2) Injector Technical Videos

Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get SPLERETT former i PURPER AND PARTY more information.

St. N

Stor.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV\_mAfxh\_Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit http://shumatt.com to get the technical videos.

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

### 3.0445110024 Injector's Purchase and Delivery

### 3.1.0445110024 Injector's Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat Please contact our salesmen for specific payment information.

### 18 E. **3.2.**0445110024 Injector's Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

#### antificity. 1885 C - 65 1898 **3.3.**0445110024 Injector's Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

### 3.4.0445110024 Injector's Shipping Ways

120 100 100 de la 65 Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

# **SHUMFITT** Shenzhen Shumatt Technology Co., Ltd

### 3.5.0445110024 Injector's Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

SPLEIPTT

SPREED

 $\mathbb{S}^{[0]}$ 

#### and and the little of the little of the an -. On - On 3.6.0445110024 Injector's Logistics Time for Destination Out of China's Areas

### **DHL Logistics Time :**

Country or Region of Hong Kong, Departure China		0 0		Australia and Zealand	New	Europe	America	Other Countries
China's Mainlar	nd	7 Days	7 Days	8 Days	1	8 Days	8-12 Days	7-10 Days
<b>PS Logistics Ti</b>	me: (	Country o	r Region of Departur	e: China's Ma	inland	St. St.	Stron.	Star -
Country of Destination		nated I Time	Country of Destination	Estimated Arrival Time	Cou	ntry of Desti	nation	Estimated Arrival Time
Japan	3 D	ays	Stand OK Standing	5-7Days	51450	Egypt	29.50°	5-7 Days
Turkey	5-7	Days	Singapore	3 Days		Switzerland	d	5-7 Days
Bahrain	5-7	Days	Latvia	7-10 Days	and a	New Zealan	6°	7-10 Days
Sri Lanka	5-7	Days	Thailand	3 Days	201	Austria	201	5-7 Days
Romania	5-7	Days	Vietnam	3-5 Days	і. 	Estonia	sti . at	5-7 Days
Malaysia	3-5	Days	Israel	5-7 Days	200	Mexico	37	7-10 Days
France	5-7	Days	America	5-7 Days	- Un	ited Arab Em	irates	5-7 Days
taly for	5-7	Days	Netherlands	5-7 Days	Ship	Bengal	St. St.	7-10 Days
Lebanon	5-7	Days	Philippine	3-5 Days	4	Greece	~	7-10 Days
South Korea	3 D	ays	Spain	5-7 Days	all the	Myanmar	er All	5-7 Days
Canada	5-7	Days	Germany	5-7 Days		Saudi Arabi	a	7-10 Days
Portugal	5-7	Days	Australia	5-7 Days	n. _159	South Afric	a j	7-10 Days
Denmark	5-7 Days		Belgium	5-7 Days	30.0	Ukraine	302.	7-10 Days
India	7-10	Days	Qatar	7-10 Days	1. J	Poland	5 <sup>15</sup>	5-7 Days
Indonesia	3-5	Days	Morocco	7-10 Days	S.M.	Pakistan	23.00	7-10 Days
Kuwait	7-10	Days	л л л	. d	ri -	23		a a

The logistics time is for reference only, subjects are according to the actual arrival.

### 3.7.0445110024 Injector's Packing

1000 C and the **Domestic express packaging:** Usually wrapped in waterproof scotch tape, such as picture No.2. International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective 38,000 film, such as picture No. 3.


Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4,  $\omega^{[0]}$ also, the products can be packaged according to customers' requirements.

The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

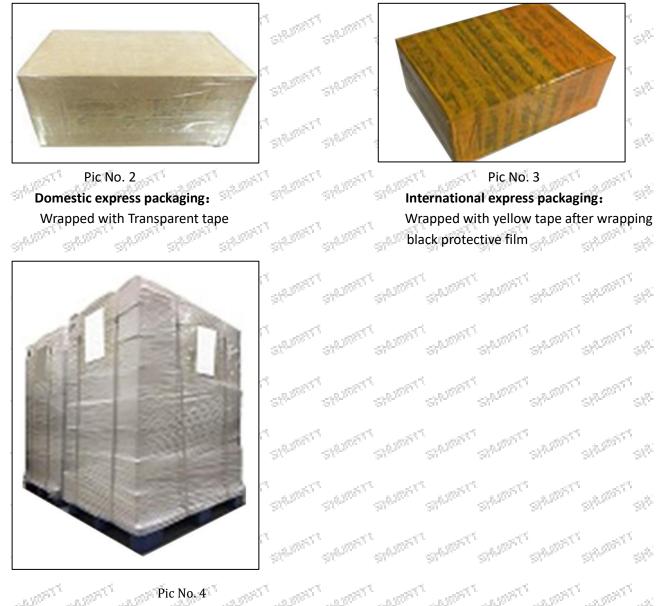

Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties and and a start and the

### 4.0445110024 Injector's Storage Standard

(1) Choose a suitable storage place

1795 The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry. States States

## (2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do antirust treatment in time. Packaged injectors must be protected from damage.

### (3) Keep the warehouse dry and preventing moisture

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd 1.000 C

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion of the fuel injectors is significantly reduced.

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

### (4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

- **A** It is forbidden to leave the injector exposed in the air for a long time.
  - It is forbidden to store acid, alkali, salt and other substances together with the injector.
  - A The unpacked fuel injector must be rust-proof during secondary storage.

### 5. Company Information



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

♥ Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: <u>1.10.0445110024</u> Injector Warranty Instructions)

No.	Name	WeChat/WhatsApp	Email	Facebook	YouTube
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li
2	lvy	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY
3 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Rebecca S	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li
9.00	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca
10	Eric S	+86 18319033618	sales3@shumatt.com	Store Store	- 91° - 91°
11	Wayne ( Joaquín en español )	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt
12	Sylvia	+86 18312499884	sales6@shumatt.com	1. 18 18 M	and the second
31	- 91 91 91.	Visit http://shumatt.com to ob	tain the latest information of sales-m	ien St	- 90° - 90°
		PS: Shumatt's sales-men's e	mails are all end with @shumatt.com	า	

5.2. Sales-men's Contact Information

# 6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445110024 *Injector* CRI1-13 *Technical File*" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445110024 *Injector* CRI1-13 *Technical File*" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445110024 *Injector* CRI1-13 *Technical File*" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445110024 *Injector* CRI1-13 *Technical File*" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445110024 *Injector* CRI1-13 *Technical File*" will violate the *"Copyright Law of the People's Republic of China"* and other laws and regulations and the provisions of relevant international parameters.

States.

SPATER

519320

53.4573

SPRENS .

519,39505

conventions.  $a^{\mu \prime}$ 

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd