









SPANDATT

SPRING

0445110176 Injector CRI2.1Technical File

SPREED

Stand	ARTER PAR
1.0445110176 Injector's Introduction	2
1.1. 0445110176 Injector's Basic Information	2
1.2. 0445110176 Injector's Common Part Number	2
1.3.0445110176 Injector's Matching Information	
1.4.0445110176 Injector's Parameter	
1.5.0445110176 Injector's Specifications and Dimensions	
1.6. 0445110176 Injector's Quality Control 1.7. 0445110176 Injector's Customized Service	
1.7. 0445110176 Injector's Customized Service	2017
1.8.0445110176 Injector's Packing List and Package Size	
1.9.0445110176 Injector's Testing Standard and Certificate	£
1.11.0445110176 Injector's Manufacturer	
1.10.0445110176 Injector's Warranty Instructions 1.11.0445110176 Injector's Manufacturer 2.0445110176 Injector Technical Support	**************************************
2.1.0445110176 Injector's Part Number Location	
2.2.0445110176 Injector's Application Scenarios	
2 3 0445110176 Injector's Installation	9
2.4. 0445110176 Injector 's Reasons for Not Working Normally	
2.4. 0445110176 Injector 's Reasons for Not Working Normally 2.5. 0445110176 Injector 's Causes of Damage	
2.6.0445110176 Injector's Technical Support Obtaining Methods	
3.0445110176 Injector's Purchase and Delivery	
3.1.0445110176 Injector's Purchase Payment Term	
3.2.0445110176 Injector's Main Sales Markets	
3.1.0445110176 Injector's Purchase Payment Term 3.2.0445110176 Injector's Main Sales Markets 3.3.0445110176 Injector's Declaration Requirements	
3.4.0445110176 Injector's Shipping Ways	
3.5.0445110176 Injector's Lead time	
3.6.0445110176 Injector's Logistics Time for Destination Out of China's Areas	
3.7.0445110176 Injector's Packing	
4.0445110176 Injector's Storage Standard	
5. Company Information:	
5.1. Company Introduction	
5.2. Sales-men's Contact Information 6. Copyright Statement	
- Sherri Sher	N 31.
	. and
alle alle alle alle alle alle alle alle	37° - 53°
SAPENIL SAEELL	a there a
den	87° - 58°

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

The The The Street Street

. and

Tel: +8675523215133 Website : www.shumatt.com

ATTACK STREET STREET

0445110176 Injector CRI2.1 Technical File

1.0445110176 Injector's Introduction

1.1. 0445110176 Injector's Basic Information

State Title State	China made new high quality diesel injector 0445110176 fuel injector CRI2.1
SKU 1	G1W20445110176
SKU 2	

1.2. 0445110176 Injector's Common Part Number

(1) Injector's Exchange Information

31. 31. 1	Injector Part Number	Re-manufactured Part Number	. <u>80.</u> 80.
and with	0445110176	0 986 435 111	Then Then
Stran Stran	0 445 110 177	an and an an a	n den de

(2) Injector's Application Information

Injector Part	MERCEDES-BENZ Car				
Number	Model				
5	648 070 02 87	da da	at at	5 5	5
0445110177	648 070 04 87	an and a	19 - 19 - 19 - 19 - 19 - 19 - 19 - 19 -	and st	
0443110177	A 648 070 04 87				
al and a start of	A 648 070 02 87	and a start of the second	and all all	an and an	
0 445 110 176	648 070 02 87	_			
	A 648 070 02 87	and an and a second		and and all	
50 50 50	648 070 02 87	20. 20.	3	20 20	
A MARTIN A MARTIN	648 070 02 87 0080	and and a	and a start as	and a start in	
ST ST ST 0.096.425.111	A 648 070 02 87 0080	. șt., șt.,	97° 97°		
0 986 435 111 -	A 648 070 02 87	The The	The The	and and	and the second se
	A 648 070 02 87 80	en storn sto	er stor st	an an	S.
at at	648070 02 87 80	In In	in in	al al	-5

(3) Injector's Part Number Common Writing

0445110177, 0445110176, 0986435111, 0445110177, 0445110176, 0986435111, 0445110177, 0445110176, 0986435111, 0445110177, 0445110176, 0986435111, 0445110177, 0445110176, 0986435111, 0445110177, 0445110176, 0986435111, 0445110177, 0445110176, 0986435111, 6480700487, 6480700487, A 6480700487, A 6480700487, 6480700287, 6480700287, 64807002870080, 64807002870080, A 64807002 87, A 6480700287, 648070028780, 648070028780, A 64807002870080, A 64807002870080, A 648070028780, A 648070028780

1.3.0445110176 Injector's Matching Information

The The The Area The

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

. 18⁴⁷

vehicle brand	Series	Car Model	Engine Model	Production date	Powe r (KW)	emission standard	Horse powe r	Manufacturer	Emissio n	Cylinder	Po So (
MERCEDES -BENZ	C-Klasse [203]	C 200 CDI	OM 646.962	05/2003 - 03/2007	75- 90 kW	102- 122 PS	/	/	/		
MERCEDES -BENZ	C-Klasse [203] Sportcoup e	C 200 CDI Sportcoup e	OM64696	03/2003 - 02/2008	90 kW	122 PS	/	/	/		
MERCEDES -BENZ	C-Klasse [203] T- Modell	C 200 CDI T-Modell	OM 646.962	03/2003 - 08/2007	75 kW	102 PS	/	/	/		
MERCEDES -BENZ	C-Klasse [203] T- Modell	C 200 CDI T-Model	OM64696	03/2003 - 08/2007	90 kW	122 PS	/	/	/		
MERCEDES -BENZ	C-Klasse [203]	C 220 CDI	OM 646.963	03/2003 - 02/2007	110 kW	150 PS	/	/	/		
MERCEDES -BENZ	C-Klasse [203] Sportcoup e	C 220 CDI Sportcoup e	OM 646.963	05/2004 - 02/2008	110 kW	150 PS	/	/	/		
MERCEDES -BENZ	C-Klasse [203] T- Modell	C 220 CDI T-Modell	OM 646.963	03/2003 - 08/2007	100- 110 kW	136- 150 PS	/	/	/		
MERCEDES -BENZ	CLC-Klasse [203]	CLC 200 CDI	OM64696	03/2008 - 05/2010	90 kW	122 PS	/	/	/		
MERCEDES -BENZ	CLC-Klasse [203]	CLC 220 CDI	OM 646.963	03/2008 - 05/2010	110 kW	150 PS	/	/	/		
MERCEDES -BENZ	CLK-Klasse [209] Coupe	CLK 220 CDI Coupe	OM 646.966	04/2005 - 04/2009	100- 110 kW	136- 150 PS	/	/	/		
MERCEDES -BENZ	E-Klasse [211]	E 200 CDI	OM 646.951	07/2002 - 12/2006	75 kW	102 PS	/	/	/		
MERCEDES -BENZ	E-Klasse [211]	E 200 CDI	OM 646.951	07/2002 - 12/2006	90 kW	122 PS	/	/	/		
MERCEDES -BENZ	E-Klasse [211]	E 220 CDI	OM 646.961	03/2002 - 01/2009	100 kW	136 PS	/	/	/		
MERCEDES -BENZ	E-Klasse [211]	E 220 CDI	OM 646.961	03/2002 - 03/2006	110 kW	150 PS	/	/	/		

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

					07					
MERCEDES -BENZ	E-Klasse [211] T- Modell	E 220 CDI T-Modell	OM 646.961	02/2003 - 08/2009	100 kW	136 PS	/	/	/	
MERCEDES -BENZ	E-Klasse [211] T- Modell	E 220 CDI T-Modell	OM 646.961	02/2003 - 03/2006	110 kW	150 PS	/	/	/	
MERCEDES -BENZ	E-Klasse [211]	E 270 CDI	OM 647.961	03/2002 - 03/2005	130 kW	177 PS	/	/	/	
MERCEDES -BENZ	E-Klasse [211] T- Modell	E 270 CDI T-Modell	OM 647.961	02/2003 - 03/2005	120- 130 kW	163- 177 PS	/	/	/	
MERCEDES -BENZ	E-Klasse [211]	E 280 CDI	OM 648.961	04/2004 - 03/2005	130 kW	177 PS	/	/	/	
MERCEDES -BENZ	E-Klasse [211] T- Modell	E 280 CDI T-Modell	OM 648.961	04/2004 - 03/2005	130 kW	177 PS	/	/	/	
MERCEDES -BENZ	E-Klasse [211]	E 320 CDI	OM 648.961	11/2002 - 08/2006	150 kW	204 PS	/	/	/	
MERCEDES -BENZ	E-Klasse [211] T- Modell	E 320 CDI T-Modell	OM 648.961	02/2003 - 03/2005	150 kW	204 PS	/	/	/	
MERCEDES -BENZ	S-Klasse [220]	S 320 CDI	OM 648.960	09/2002 - 08/2005	150 kW	204 PS	/	/	/	
MERCEDES -BENZ	S-Klasse [220]	S 320 CDI	OM 648.960	09/2002 - 08/2005	150 kW	204 PS	/	/	/	

1.4.0445110176 Injector's Parameter

Adaptation System: Common Rail System

Injector Series: 110 Series

Parameter Performance: CRI2.1

Matching Accessories:

Injector Type: Electromagnetic Injector

Support System Maximum Pressure: 1600 Vehicle Configuration Information: MERCEDES-BEI

1.5.0445110176 Injector's Specifications and Dimensions Injector Size: 21.5cm*4 cm *4 cm = 344cm³ (L*W*H=V)

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

Injector_Net Weight: 0.55kg Gross Weight: 0.6kg Injector Quality: China Made Brand New Package Size: 28cm*7 cm *7 cm = 1372 cm³ Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces 2.99

1.6. 0445110176 Injector's Quality Control

(1) Injector Testing

1990 $\delta^{(2)}$ All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions. 2.578.57

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque, 19²⁰⁰

(3) Injector Inspection

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop. $\mathbb{R}^{\mathbb{R}^{2}}$ $s\delta^{2n}$

1.7. 0445110176 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.



(2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.


Customized injector packages no less than 1000 pieces.

 \mathcal{F}_{22} Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

- 200

A Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

1.8.0445110176 Injector's Packing List and Package Size



Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

SHUMF	TT Shenzhen Shum	att Technology Co.,	Ltd
Name	Fuel Injector	O-Ring	Gasket F 00V C17 503
Description	Fuel injector part number: 0445110176	Ensure to meet the standard of the sealing performance between the injector and the engine	Made of brass, used to ensure the tight fit between the injector cap end and the engine
No.		<u> </u>	6
image Strand	1 ¹⁷ 31 ² 31 ^{2,2}	art art	576.27 T
Name	Nozzle Protective Cover Cap	Injector House Protective Cover Cap	Solenoid Valve Protective Cap
Description	Protect nozzle holes from being polluted and blocked	Protect oil inlet from being polluted and blocked	Protect the solenoid valve body and terminals from being damaged by external forces
No.		8	
Name	VCI Anti-rust Bag	Bubble Bag	Injector Packing Box

Prevent the injector from being

Place injector and injector

▲ O-ring and gasket are disposable installation accessories, and need to be replaced for re-installation.

▲ The nozzle protective cover, the injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused.

▲ VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

▲ The injector and the installation parts should be coated with appropriate sealing oil during installation.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

(2) Injector Box Size

Description

Prevent fuel injector from

d	No.	Na	me		Ir	njector Pa	ackage S	ize (cm))		<u>да</u> ,
0.1	1	Inject	or Box	 			28*7*7			 	
	20			 100	15	10	10	20		 15	

1.9.0445110176 Injector's Testing Standard and Certificate

 $-g b_{i}^{2p}$ We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

- 301	- 367	987	- ³²⁷ - 1	-80°	-94	Stor	89.00	82.00	367	20.	
BOTEN	测试报告	4.05.2019 10:42:09									
神企业:			5378-2007	STR. STR.	57. 570,000	STRUCT	T ¹ SHARE	TT. SPARTS	Strates	CT SPLATE	ť
121 :	1814 :		. A. 300				- 15 ⁵⁰⁰	- 13 Star		. 2.5 ⁰⁰	
ie:	松潤人:		201	364	100	201.	30	30.1	30.0	397.0	
er BBE.											
5iē.	送检单位.			24	21	-1	24		. A.		23
6 Д.	客户姓名:	in the second second		TT STRUTT	STRATES	TT SPART	r" shini	N ^T SHUTT	States	CT STREET	50
N551101生:			100 ⁰⁰⁰⁰		30 ⁰⁰⁰	- Star	Charles -	Star.	and the second sec	a de la companya de l	
22件名标: 助生35				- · ·					200 - D		
2号-零件号:				55 - 2	TT SPEDER	ST. SPUTT	di s	di s	dh ai	$(1, \dots, n)$	53
KINA:				·	·		°	°	11. J. M	1	1
	檢測結果		549.575	ST STRUCT	44.4		STA STA	TT SALED	TT BRIDE	T Strand	
0525080070: C05000-6511	NAMES RESIL	100 X KIN									
LEAK TEST: NE	es	30.8±':4 🗸									
Factor an WARN an	+ 350	48429X V	379,577	TT SPEER	TT SPLEE	TT STRUM	STI STRUTT	R ^I SHUT	TT SRADE	77 549-595	\mathcal{D}^{2}
Maar 2013	218 9±144 € 2	·····z····· 🗸	1. J. B. B. C.	- 19 Barris	and the second	- All		- A. M.	1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 -	-3 ^{2,30}	
TL: 28-4 U.: 141	34.6±8.5 0.3 12.7±44 0.3	······································	10.0	-0-1	-014	-011	-01	(27)	1000	-000	
VE: 42	41218 03	V									
				A	A	al a	A	19	A	æ.,	ιų.
			578.575	SPEER	TT SPLEE	5 ⁷⁴ 51 ^{8,109}	STATURE	SALAN SALAN	ST. SRADE	CT SPR.201	91
			and the second second	all and the second		all and a second	- Store	- Sharr	and the second second	a starter	
				1990 C 1990	100	1997	Cart C	540° *		1947 1	
ai []az []az []a4 []a5 []	ne_ar_as 2007015.		:								
· 推荐前 [] 重论后			SPRENT	57 319:508	Stores	ST STORE	NT STATE	T. Statu	SHARE SHARES	T SPLEET	Ċ,
Pre Sta	an an	n' strin		1	1	- 6.3 ⁶⁷	- 6.9 ⁹⁹	- 1. S ^{OD}	$\sim 10^{10}$	1. 1. C ²⁰	1
			- 320	-927	-90°	See.	1920	- BR	- 88°	38.00	

1.10.0445110176 Injector's Warranty Instructions

(1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment 1997 when the injector is abnormal during use as evidence to feed back to the salesman. Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the

engine, 4. Engine noise, 5. oil leakage etc. (2) . Injector Warranty Coverage

Within 15 days after customer receives the 0445110176 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445110176 injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 578200 months from the date of repairing.

(3) . Injector Out of Warranty Coverage

The warranty period has expired.

LINE C atter with . Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment. ent.

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality 1230 11 May 201 185 an star all the

and other issues.

13⁰³⁰

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance 527,200 SANDAR . 531.30° 34.50 32.503 " state SHAREN SHAREN manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine UNRIT' 17 March DEPET 1 maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.11.0445110176 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

2.0445110176 Injector Technical Support

2.1.0445110176 Injector's Part Number Location

1) E.g.: The injector part number see as follows




d S	al ^{fr} at	the applicability at the state
	No.	Name
e Se se	Anti	brand, logo, part number, series number
	В	nozzle part number
6	an and	and and and and -

2.2.0445110176 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

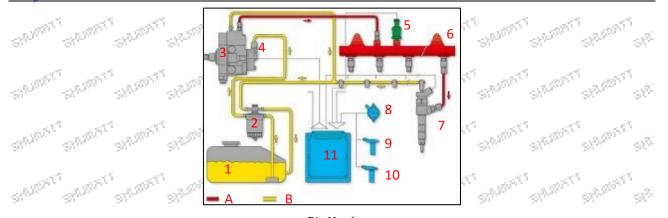

	1	. C.	Pic	: No. 1	h. h. l.	1	15. 25
No.	Name	No.	Name	No.	Name	No.	Name
1	Tank	5	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	A	High Pressure Oil Circuit
s ¹⁰ 2	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	B	Low Pressure Oil Circuit
3	High-Pressure Pump	് 7	Injector	11	ECU Electronic Control Unit	100	The The
4	Fuel Gear Pump	8	Accelerator Pedal	all the second	all all all	er de	1 - A - A

2.3.0445110176 Injector's Installation

SHUMATT

(1) .0445110176 Injector's Installation Precautions:

▲ The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

▲ When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring.

▲ Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.
It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.4. 0445110176 Injector 's Reasons for Not Working Normally

(1) There is air in the oil circuit of the engine fuel system.

(2) Vehicle oil pump oil supply system is not normal.

(3) Engine common rail system oil leakage or pressure limiting valve damage.

(4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.

(5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.

▲ Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

2.5. 0445110176 Injector 's Causes of Damage

(1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector .

(2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.

(3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.

(4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.

(5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.

(6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.

(7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
(8) The injector will be damaged naturally at the end of its working life.

(9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly.
A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

2.6.0445110176 Injector's Technical Support Obtaining Methods

(1) Injector Technical File, visit <u>http://shumatt.com</u> to get the technical file.

(2) Injector Technical Videos

Facebook: Visit <u>https://www.facebook.com/hison.li</u> to get the technical videos, constantly follow can get more information.

YouTube: <u>https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw</u> to get the technical videos, constantly follow can get more information.

Shumatt: Visit <u>http://shumatt.com</u> to get the technical videos.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd Tel: +8675523215133 Website : www.shumatt.com

d De

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

3.0445110176 Injector's Purchase and Delivery

3.1.0445110176 Injector's Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

Please contact our salesmen for specific payment information.

The Then The

. Tree Tree 3.2.0445110176 Injector's Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

2. 69⁷⁵ $e^{i\beta \tilde{h}^{(1)}}$ **3.3.**0445110176 Injector's Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: : All contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4.0445110176 Injector's Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

179

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

d Co 3.5.0445110176 Injector's Lead time

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and special cases).

3.6.0445110176 Injector's Logistics Time for Destination Out of China's Areas

DHL Logistics Time :

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Snenznen Snumatt lechnology Co., Ltd					
Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Stor Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days	The The The	al 12	1 at at .	Dr. Dr.
The logistics tim	e is for referer	nce only, subjects are ac	cording to the	actual arrival.	31 ⁴⁹⁰ 51

3.7.0445110176 Injector's Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, also, the products can be packaged according to customers' requirements.

The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.



Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd



39.57 Pic No. 4 Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4.0445110176 Injector's Storage Standard

(1) Choose a suitable storage place

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry.

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do antirust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion and h 1895 T of the fuel injectors is significantly reduced. 1000 all's 95⁵

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content. SPREAT SALERT

(4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse - Sharr

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

It is forbidden to leave the injector exposed in the air for a long time. - 100⁰⁴⁷⁵

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

4 19 ^{6 6} 7

▲ _ It is forbidden to store acid, alkali, salt and other substances together with the injector.

NOT STATE

. 1997 - C

- 18 E

The unpacked fuel injector must be rust-proof during secondary storage.

5. Company Information



5.1. Company Introduction Chinese Name: 深圳市舒马特科技有限公司 English Name: Shenzhen Shumatt Technology Co., Ltd

Mob Phone/WeChat: +86-13410541523

HK Telephone: +852-67653519

Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

STRUMPT STRUMPT

SPERMENT

SAUDAT

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: 1.10.0445110176 Injector Warranty Instructions)

1.18

No.	Name	WeChat/WhatsApp Email		Facebook	YouTube
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li
2,000	lvy soo	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY
3	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca
10	Eric	+86 18319033618	sales3@shumatt.com		
11	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt
12	Sylvia	+86 18312499884	sales6@shumatt.com	Star Stor	18 - 18 - 18 - 18 - 18 - 18 - 18 - 18 -
		Visit http://shumatt.com to ob	tain the latest information of sales-m	en	
		PS: Shumatt's sales-men's er	mails are all end with @shumatt.com		d

6. Copyright Statement

150

and Co

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445110176 Injector CRI2.1Technical File" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445110176 Injector CRI2.1Technical File" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445110176 InjectorCRI1-13Technical File" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445110176 Injector CRI2.1 Technical File" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.

 $\otimes^{\mathbb{Q}_{2}}$

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd