









SHUMATI

SPRING

0445110217 Injector CRI2.1 Technical File

SPARAT

Street
1.0445110217 Injector's Introduction
1.1. 0445110217 Injector's Basic Information
1.2. 0445110217 Injector's Common Part Number
1.3.0445110217 Injector's Matching Information
1.4.0445110217 Injector's Parameter
1.5.0445110217 Injector's Specifications and Dimensions
1.6. 0445110217 Injector's Quality Control
1.6. 0445110217 Injector's Quality Control
1.8.0445110217 Injector's Packing List and Package Size
1.9.0445110217 Injector's Testing Standard and Certificate
1.10.0445110217 Injector's Warranty Instructions 5 1.11.0445110217 Injector's Manufacturer 6 2.0445110217 Injector Technical Support 7
2.0445110217 Injector Technical Support
2.1.0445110217 Injector's Part Number Location
2.2.0445110217 Injector's Application Scenarios
2.3.0445110217 Injector's Installation
2.4. 0445110217 Injector 's Reasons for Not Working Normally
2.5. 0445110217 Injector 's Causes of Damage
2.6.0445110217 Injector's Technical Support Obtaining Methods
3.0445110217 Injector's Purchase and Delivery
3.1.0445110217 Injector's Purchase Payment Term93.2.0445110217 Injector's Main Sales Markets93.3.0445110217 Injector's Declaration Requirements9
3.3.0445110217 Injector's Declaration Requirements
3.4.0445110217 Injector's Shipping Ways
3.5.0445110217 Injector's Lead time
3.6.0445110217 Injector's Logistics Time for Destination Out of China's Areas
3.7.0445110217 Injector's Packing
4.0445110217 Injector's Storage Standard11
4.0445110217 Injector's Storage Standard 11 5. Company Information 12
4.0445110217 Injector's Storage Standard 11
4.0445110217 Injector's Storage Standard 11 5. Company Information 12 5.1. Company Introduction 12
4.0445110217 Injector's Storage Standard 11 5. Company Information 12 5.1. Company Introduction 12
4.0445110217 Injector's Storage Standard 11 5. Company Information 12
4.0445110217 Injector's Storage Standard 11 5. Company Information 12 5.1. Company Introduction 12

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

and a state of the state of the

. and

Tel: +8675523215133 Website : www.shumatt.com

ATTACK STREET STREET

SHUMFITT Shenzhen Shumatt Technology Co., Ltd

0445110217 Injector CRI2.1 Technical File

SAURA

1.0445110217 Injector's Introduction

Street, Street, Street, Street, -2010 1.1. 0445110217 Injector's Basic Information

and Title and an	China made new high quality diesel injector 0445110217 fuel injector CRI2.1
SKU 1	G1W20445110217
SKU 2	and a start a
31,	, 21, 21, 21, 21, 21, 21, 21, 21, 21, 21

1.2. 0445110217 Injector's Common Part Number

(1) Injector's Exchange Information

(1) Injector's Ex	change Information	and a state of the second second	and and and and
20 20	Injector Part Number	Re-manufactured Part Number	201. 201.
at the	0445110217	0 986 435 263	the the
Stores Stores	32 3 32 32 32 32 32 32 32 32 32 32 32 32	F 00E 200 440	1. 24 m - 24

(2) Injector's Application Information

Injector Part Number	JEEP Car Model	VM (MOTORI/STA BILIMENTI MEC.)			
0445110217	5142 811AA	15 06 2047F		. ve.	19-4 T
0445110217	05142 811AA		1. The	and and a	15 ⁵⁵
0 986 435 263	05142 811AA	15 06 2047F		380 380	310
0 960 435 203	5142 811AA	The The	The The	Tan Tan	100

(3) Injector's Part Number Common Writing

0445110217, 0986435263, 0445110217, 0986435263, 0445110217, 0986435263, 0 445110217, 0 986435263, 0445 110 217, 0986 435 263, 0445110 217, 0986435 263, 0445 110217, 0986 435263, 05142 811AA, 05142811AA, 15 06 2047F, 15062047F, 5142 811AA,

5142811AA al an

1789 august 2.7787.7 LINE I 2.5595 1.3.0445110217 Injector's Matching Information

vehicle brand	Series	Car Model	Engine Model	Production date	Power (KW)	emission stand	Horse power	Manufacturer	Emission	Cylinder	Power Source (V)
JEEP	Libert y [KJ]	Libert y 2.8 CRD	ENR	09/2004 - 08/2006	112- 120 kW	152- 163 PS	/	/	/	4	12
JEEP	Libert y [KJ]	Libert y 2.8 x4	ENR	08/2005 - 12/2007	112- 120 kW	152- 163 PS	/	1	/	4	12

SPLEEPER

SALERS

1.4.0445110217 Injector's Parameter

- 100 M

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Adaptation System: Common Rail System Injector Series: 110 Series Parameter Performance: CRI2.1 Matching Accessories: F 00V C17 503, gasket Injector Type: Electromagnetic Injector Support System Maximum Pressure: 1600 Vehicle Configuration Information: JEEP/VM (MOTORI/STABILIMENTI MEC.)

1.5.0445110217 Injector's Specifications and Dimensions Injector Size: 21.5cm*4 cm *4 cm = 344cm³ (L*W*H=V) Injector Net Weight: 0.55kg Gross Weight: 0.6kg Injector Quality: China Made Brand New Package Size: 28cm*7 cm *7 cm = 1372 cm³ Injector Type: Diesel Common Rail Injector MOQ: 4 Pieces

1.6. 0445110217 Injector's Quality Control

(1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque,

(3) Injector Inspection


150

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

1.7. 0445110217 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd



SPUDIN	and the second		ø _		STT STE
SPERANT	stri tien s		. a	20 Jan Januar 1997 Januar 1997	anti' alfi
SALERS	Injector nozzle engraving	Injector house lettering and QR code	100 C	Injector box and label	1577 ¹ - 157

(2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces. Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

A Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

1.8.0445110217 Injector's Packing List and Package Size

(1) Injector Spare Parts List

No.			
ST ST	Standy, Sandy, Standy, S	and a share and a	3 ⁰⁰
sh ^{inina} ge	Shimatt		an O in
Name	Fuel Injector	O-Ring	Gasket F 00V C17 503
Description	Fuel injector part number: 0445110217	Ensure to meet the standard of the sealing performance between the injector and the engine	Made of brass, used to ensure the tight fit between the injector cap end and the engine
No.	4	5	an 6 an ai
A Mage A	rr and and	8 ¹⁷ 8 ¹⁷ 8 ¹⁷	ante at
Name _ 🔊	Nozzle Protective Cover Cap	Injector House Protective Cover Cap	Solenoid Valve Protective Cap
Name Description	Nozzle Protective Cover Cap Protect nozzle holes from being polluted and blocked	Injector House Protective Cover Cap Protect oil inlet from being polluted and blocked	Solenoid Valve Protective Cap Protect the solenoid valve body and terminals from being damaged by external forces
Store Store	Protect nozzle holes from	Protect oil inlet from	Protect the solenoid valve body and terminals from being damaged by
Description	Protect nozzle holes from	Protect oil inlet from	Protect the solenoid valve body and terminals from being damaged by
Description	Protect nozzle holes from	Protect oil inlet from being polluted and blocked 8	Protect the solenoid valve body and terminals from being damaged by external forces 9
Description	Protect nozzle holes from	Protect oil inlet from being polluted and blocked 8	Protect the solenoid valve body and terminals from being damaged by external forces 9

▲ Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.

• O-ring and gasket are disposable installation accessories, and need to be replaced for re-installation.


A The nozzle protective cover, the injector house protective cover, and the solenoid valve protective

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

cover are recyclable accessories that can be reused.

VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

▲ The injector and the installation parts should be coated with appropriate sealing oil during installation.

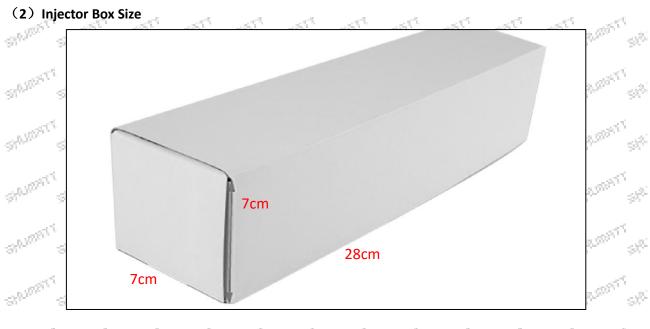

			- 10 m			100	100			100		10 m	
-33	No.	Na	me			li li	njector P	ackage S	ize(cm)			ġŝ.
1.00	1	Inject	or Box					28*7*7					
	and the	150	150	15	all a	all a	Sec.	and the	and the	150	155	15	

1.9.0445110217 Injector's Testing Standard and Certificate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.

	n. 30	2	<u> </u>	- 1994 - C	all	da e	Sec.	201	201	241	200
TEN	测试报告	4.05.201	9 10:42:09								
H企业:				100	r steine	57 SPLINE	STALLON STALLON	STALES	SAUDE SAUDE	ari Status	57 17
9121 :	18址:			320	- A. 1990	Aller	add the second	- A.S.	- A.S.	A.S. 19	- 43
4 Ξ :	松潤人:			200	100	201	201	201	353	350.	200
en#15:											
5ið	送检单位。				đ	đ	a .	ari Silutai	17. 519.507	ari Stratte	17 ⊜¦\$3
ł¤:	客户姓名:		-	. 68	TT SPRINT	57 SPAINE	SPUTT	10 a. 10 a.	10 a dil	10 a di 1	1
KPRINIE:				200	Sec.	25	- 19 C	1979 - C	200	1997 - C.	- 377
(州名称:)	6 #25										
						-		_	-	~	
				32.575	STRUMP	TT SPORT	States	ari. Shutai	SPURI	517 JA.1818	17 31 ⁸³
21A.				133 M	183 M	- A.S.	- A.S.		- 13 ST		a the second
	检测结果	E		58 S. L	200	dian.	200	20.	2001	200	200
-00000 : 01088090 : 000000- 10166		excen contrat									
LEAK TEST: 32		es 20.82-11.6	~		A	- A	SILLER	1	10	19	10
Fade: at WARM: at		0 	-	15	STREET	ST SPORT	er ande	ST STUDI	an anan	ST. SHERE	17 38 ³
Mai: 2013		e	~	40 ⁰⁰⁰⁰		Star .	- Star		53000	all and a second	- 28 ⁰⁰
TL: 364 LL: 160		0 ·····b·····	1						101-1	100 ⁻¹⁰	
VE: 42	4.5±1.8	o	*								
					STREET	57 - 5830F	S. State	an Anta	ST. SHEEL	ST. SWEET	1 ⁵⁷ 1979
				53.205		1	63 ⁹⁷	1	1	11	1
				300	- 90.0	-96-	- 53 Co.	681	- 32.00	- 682.00	- 335
11 02 02 04 住印前 重注册	desdesdesde8	6915.									
					er Steller	579,500	ST STREET	state	ST. SANTO	ST. SWITT	5 51
çe. Ş	it ^{yn} si	1,500 S	de an	1.00	100	1.00	- 10 M		- 1.5°	-4.20	

1.10.0445110217 Injector's Warranty Instructions

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

 $\sim 10^{-1}$

(1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

(2) . Injector Warranty Coverage

 $\mathcal{A}^{(2)}(t)$ Within 15 days after customer receives the 0445110217 injector, if there is a performance failure and المراجعة the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445110217 injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

A Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing. 100 TRADUCT TRADUCT TRADUCT

(3) . Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire). Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality THE A DEAL A DEAL A DEAL A DEAL A DEAL and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance A Stor " States, States, States, States, States, - 3⁴⁵⁰⁰ A.S. manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine NEEL maintenance manual. OF T

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual. ∂D_{2} d 1 -

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.11.0445110217 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

339⁹⁶00 2.0445110217 Injector Technical Support

2.1.0445110217 Injector's Part Number Location

1) E.g.: The injector part number see as follows




. 1	No.	Name
lan.	St. St.	brand, logo, part number,
	A	series number
10	B∂ [®]	nozzle part number
for.	30, 30,	21. 21. 21. 21. 21.

SANTA

SHADATT

-31^{0,308} 2.2.0445110217 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.





	all all	0 	Pic Pic	: No. 1	and all as	an a	and a start as
No.	Name	No.	Name	No.	Name	No.	Name
-Aller C	Tank	് 	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	Â	High Pressure Oil Circuit
2	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	В	Low Pressure Oil Circuit
3.2	High-Pressure Pump	7	Injector	312 ⁰⁰	ECU Electronic Control Unit	1997 - 1999 1997 - 1999	CAR STATE
4	Fuel Gear Pump	8	Accelerator Pedal			-94 s	

2.3.0445110217 Injector's Installation (1) .0445110217 Injector's Installation Precautions:

A The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Tel: +8675523215133 Website : www.shumatt.com

tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector. When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head

and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust $\sim \phi^{2/2}$ spots, etc.

A Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the STATE STATE STATE STATE STATE STATE STATE STATE fuel injector.

When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring, The second a and the

Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

A When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual. It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products. -SAUDA $\mathcal{D}^{\mathbb{N}_{+}}$

It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

2.4. 0445110217 **Injector 's Reasons for Not Working Normally** (1) There is air in the cill circuit.

(1) There is air in the oil circuit of the engine fuel system.

(2) Vehicle oil pump oil supply system is not normal.

ahi^{ngh} (3) Engine common rail system oil leakage or pressure limiting valve damage.

(4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector - sthat 57^{4,300} Star . of the vehicle.

(5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components SPARTER T are stuck or the oil holes are blocked. SAMONT

Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced. Stream Stream Stream

2.5. 0445110217 Injector 's Causes of Damage

(1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector .

(2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.

(3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.

(4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.

(5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel

injector and causing damage to the fuel injector.

(6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.

- (7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
- (8) The injector will be damaged naturally at the end of its working life.

(9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly. A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

2.6.0445110217 Injector's Technical Support Obtaining Methods

- (1) Injector Technical File, visit http://shumatt.com to get the technical file.
- (2) Injector Technical Videos

1750 ast -19 C Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get more information.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV_mAfxh_Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit <u>http://shumatt.com</u> to get the technical videos.

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

100

3.0445110217 Injector's Purchase and Delivery 17 Star $\mathcal{P}_{\mathcal{P}_{\mathrm{S}}}$

108¹⁷ and the second 3.1.0445110217 Injector's Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

Please contact our salesmen for specific payment information.

3.2.0445110217 Injector's Main Sales Markets

120 d de Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

3.3.0445110217 Injector's Declaration Requirements

anti la Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc. A STORY 2.595.27 2.5055

3.4.0445110217 Injector's Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided Sh Sor $S^{h^{2D}}$ according to customer requirements in special cases. Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5.0445110217 Injector's Lead time

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

Lead time: Send out within 3 – 7 working days after receiving payment (Except for special products and SHAMPY SAUDEL SPREED SPR. FRE -1000 SHUDDES special cases).

Country or Region of Hong Ko Departure China		0,	Other Countries or Regions of Asia	Australia and Zealand		Europe	America	Other Countries	
China's Mainland 7 Day		s 🍧	7 Days	8 Days	30.	8 Days	8-12 Days	7-10 Days	
JPS Logistics T	ime:	Country	or Re	gion of Departur	e: China's Ma	inland	. Part	di sa	di sel
Country of Destination		mated al Time	Cou	ntry of Destination	Estimated Arrival Time	Cou	untry of Desti	nation	Estimated Arrival Time
Japan	3	Days	100	UK	5-7Days	1	Egypt	ai .	5-7 Days
Turkey	5-7	' Days	¢.	Singapore	3 Days	Sth 3	Switzerland	i st ^{ar}	5-7 Days
Bahrain	_ 5-7	' Days		Latvia	7-10 Days	_	New Zealand		7-10 Days
Sri Lanka	ri Lanka 5-7 Days		Thailand		3 Days	Austria			5-7 Days
Romania	5-7 Days		Vietnam		3-5 Days		Estonia		5-7 Days
Malaysia	3-5	Days	Israel 1		5-7 Days	Days			7-10 Days
France	5-7	' Days	America		5-7 Days	5-7 Days United A		irates	5-7 Days
Italy	5-7	' Days		Netherlands	5-7 Days	ĸ.,	Bengal	de de	7-10 Days
Lebanon	5-7	' Days	0	Philippine	3-5 Days	Stor	Greece	Store and	7-10 Days
South Korea	3	Days	Y.	Spain	5-7 Days		Myanmar	10	5-7 Days
Canada	Canada 5-7 Days		Germany		5-7 Days	7 Days Saudi Arabia		a _{Sh} sh	7-10 Days
Portugal	Portugal 5-7 Days			Australia	5-7 Days	South Africa		a	7-10 Days
Denmark	Denmark 5-7 Days		Belgium		5-7 Days	5-7 Days		8°	7-10 Days
India	7-10	0 Days		Qatar	7-10 Days	50	Poland	80.	5-7 Days
Indonesia	3-5	Days	est al	Morocco	7-10 Days	r	Pakistan	10	7-10 Days
Kuwait	7-10	0 Days	4	8 - 4 - 4	Store Store	Stor	Star	Sugar,	S. Carlor

3.6.0445110217 Injector's Logistics Time for Destination Out of China's Areas

The logistics time is for reference only, subjects are according to the actual arrival. 519.395 - ALINE SPACE SHIP! and a state AN AN

3.7.0445110217 Injector's Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2. International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, SPACENT

also, the products can be packaged according to customers' requirements.


The packing tray is made of plastic and can be recycled.

Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly. SPACE

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and SPASSAR white wrapping protective film to avoid personal injury.

THE THE STREET STREET STREET STREET STREET

Mob/WhatsApp: +86 13410541523 Email : ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd

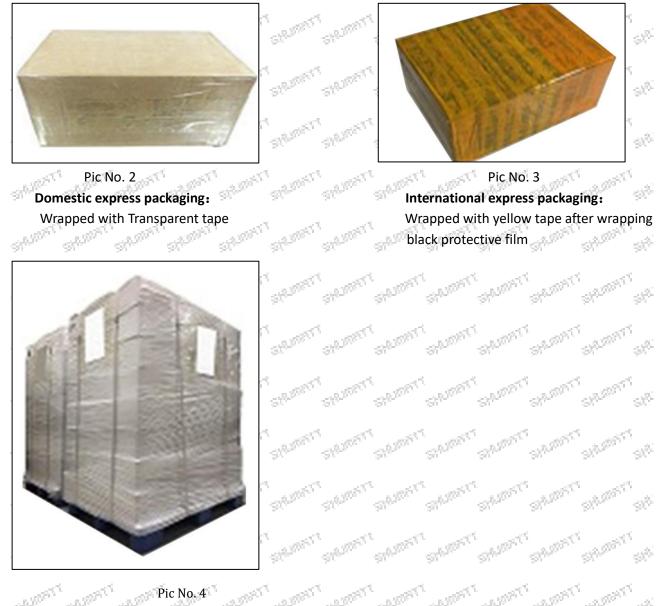

Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties AN AN AN

4.0445110217 Injector's Storage Standard

(1) Choose a suitable storage place

1795 The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area dry. $\otimes^{\mathbb{N}^{[j]}}$ States

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do antirust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

Mob/WhatsApp: +86 13410541523 Email:ruby@shumatt.com © 2022 Shenzhen Shumatt Technology Co., Ltd 1.000 C

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion of the fuel injectors is significantly reduced.

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

- ▲ It is forbidden to leave the injector exposed in the air for a long time.
 - It is forbidden to store acid, alkali, salt and other substances together with the injector.
 - A The unpacked fuel injector must be rust-proof during secondary storage.

5. Company Information



Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland

♥ Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: <u>1.10.0445110217 Injector Warranty Instructions</u>)

No.	Name	WeChat/WhatsApp	Email	Facebook	YouTube
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li
2	lvy	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY
3 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Rebecca S	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt
5	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li
9.00	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca
10	Eric S	+86 18319033618	sales3@shumatt.com	Store Store	- 91° - 91°
11	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt
12	Sylvia	+86 18312499884	sales6@shumatt.com	1. 18 18 M	and the second
31	- 91 91 91.	Visit http://shumatt.com to ob	tain the latest information of sales-m	ien St	- 90° - 90°
		PS: Shumatt's sales-men's e	mails are all end with @shumatt.com	า	

5.2. Sales-men's Contact Information

6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445110217 *Injector* CRI2.1 *Technical File*" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445110217 *Injector* CRI2.1 *Technical File*" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445110217 *Injector* CRI2.1*Technical File*" will violate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445110217 *Injector* CRI2.1 *Technical File*" will violate the "*Copyright Law of the People's Republic of China*" and other laws and regulations and the provisions of relevant international

States.

SPACE

519320

53.50

SPRENS .

519.39505

conventions. $a^{\mu \prime}$

Mob/WhatsApp: +86 13410541523 Email : <u>ruby@shumatt.com</u> © 2022 Shenzhen Shumatt Technology Co., Ltd