

0445110300 Injector CRI2-16 Technical File

SKU1: G1W20445110300











0445110300 Injector CRI2-16 Technical File

Content Content

1.0445110300 Injector's Introduction	2
1.1. 0445110300 Injector's Basic Information	2
1.2. 0445110300 Injector's Common Part Number	2
1.3.0445110300 Injector's Matching Information	2
1.3.0445110300 Injector's Matching Information	94 <u>9</u>
1.5.0445110300 Injector's Specifications and Dimensions	5
1.6. 0445110300 Injector's Quality Control	6
1.7. 0445110300 Injector's Customized Service	6
1.8.0445110300 Injector's Packing List and Package Size	6
1.9.0445110300 Injector's Testing Standard and Certificate	8
1.10.0445110300 Injector's Warranty Instructions	8
1.11.0445110300 Injector's Manufacturer	C
2.0445110300 Injector Technical Support	g
2.1.0445110300 Injector's Part Number Location	<u>ç</u>
2.1.0445110300 Injector's Part Number Location	. 9
2.2.04454402001 :	10
	11
2.5. 0445110300 Injector 's Causes of Damage	11
2.6.0445110300 Injector's Technical Support Obtaining Methods	11
3.0445110300 Injector's Purchase and Delivery	12
3.1.0445110300 Injector's Purchase Payment Term	12
3.2.0445110300 Injector's Main Sales Markets	12
	12
3.4.0445110300 Injector's Shipping Ways	12
3.5.0445110300 Injector's Lead time	12
3.6.0445110300 Injector's Logistics Time for Destination Out of China's Areas	
3.7.0445110300 Injector's Packing	13
지하는 그는 지하는 그는 지하는 지하는 지하는 지하는 지하는 지하는 그를 지하는 그를 지하는 것이 되었다.	14
4.0445110300 Injector's Storage Standard	15
5.1. Company Introduction	15
5.2. Salesmen's Contact Information	16
6. Copyright Statement	16
	200
THE	
Storm	98
SAFER STATE STATES STATES STATES STATES STATES STATES SAFERS SAFERS SAFERS SAFERS SAFERS SAFERS	48
54. 54. 54. 54. 54. 54. 54. 54. 54. 54.	, and a
CONTROL STATE	

Mob/WhatsApp: +86 13410541523 Email: ruby@shumatt.com

© 2022 Shenzhen Shumatt Technology Co., Ltd

Website: www.shumatt.com

Tel: +8675523215133



0445110300 Injector CRI2-16 Technical File

1.0445110300 Injector's Introduction Stranger Stranger Stranger Stranger

1.1. 0445110300 Injector's Basic Information

Title	China made new high quality diesel injector 0445110300 fuel injector CRI2-16
SKU 1	G1W20445110300
SKU 2	. Stor. Stor. Stor. Stor. Stor. Stor. Stor. Stor. Stor.

1.2. 0445110300 Injector's Common Part Number

(1) Injector's Exchange Information

Injector Part Number	Re-manufactured Part Number
0445110300	0 986 435 171
THE THE THE	The The The The The

(2) Injector's Application Information

Injector Part Number	ALFA ROMEO Car Model	FIAT	LANCIA	OPEL	VAUXHA LL	GMC (GENERAL MOTORS CORP.)
Styling, Styling,	55206704	55196442	55206704	55221023	5522102 3	- 9%
0445110300	55221023	55206704	55221023	The state of	- 1775 m	857
Stylen Stylen 3	33,000	55221023	1600 SIGN.	aller aller	Sep. 1	9%
15 15	55206704	55221023	55206704	-15 -15		95517512
0 986 435 171	55221023	55206704	55221023	of the state of		400
and and		55196442		and and	. 47	.41

(3) Injector's Part Number Common Writing
0445110300, 0986435171, 0 445 110 300, 0 986 435 171, 0 445 110300, 0 986 435171, 0 445110300, 0 986435171, 0445 110 300, 0986 435 171, 0445110 300, 0986435 171, 0445 110300 , 0986 435171 , 55196442 , 55206704 , 55221023 , 95517512

1.3.0445110300 Injector's Matching Information

Vehicle brand Series Car Model Engine Model Production date (KW) emission standards Horse power Manufacturer Emission Cylind	Power er Source (V)
------------------------------------------------------------------------------------------------------------------------------	---------------------------

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com Website: www.shumatt.com



Shenzhen Shumatt Technology Co., Ltd											
ALFA ROMEO	MiTo [955]	MiTo 1.6 JTD	955 A4.00 0	09/2008 - 12/2015	85 kW	116 PS	/	/	/	4	12
ALFA ROMEO	MiTo [955]	MiTo 1.6 JTD	955 A3.00 0	08/2008 - 12/2015	88 kW	120 PS	/	/	/	4	12
FIAT	Bravo '07 [198]	Bravo 1.6 MultiJe t	198 A6.00 0	02/2009 - 12/2009	66 kW	90 PS	/	/	/	4	12
FIAT	Bravo '10 [198]	Bravo 1.6 MultiJe t	198 A6.00 0	03/2010 - 12/2014	66 kW	90 PS	/	/	/	4	12
FIAT	Bravo '07 [198]	Bravo 1.6 MultiJe t	198 A3.00 0	10/2007 - 12/2009	77 kW	105 PS	/	/	/	4	12
FIAT	Bravo '10 [198]	Bravo 1.6 MultiJe t	198 A3.00 0	01/2010 - 09/2013	77 kW	105 PS	/	/	/	4	12
FIAT	Bravo '07 [198]	Bravo 1.6 MultiJe t	955 A4.00 0	11/2008 - 12/2009	85 kW	116 PS	/	/	/	4	12
FIAT	Bravo '07 [198]	Bravo 1.6 MultiJe t	198 A2.00 0	03/2008 - 12/2009	88 kW	120 PS	/	/	/	4	12
FIAT	Bravo '10 [198]	Bravo 1.6 MultiJe t	198 A2.00 0	03/2010 - 12/2014	88 kW	120 PS	/	/	/	4	12
FIAT	Doblo '10 [263]	Doblo 1.6 MultiJe t	263 A	02/2010	66 kW	90 PS	/	/	/	4	12
FIAT	Doblo '10 [263]	Doblo 1.6 MultiJe t	263 A3.00 0	02/2010	74 kW	101 PS	/	/	/	4	12
FIAT	Doblo '10 [263]	Doblo 1.6 MultiJe t	198 A3.00 0	02/2010	77 kW	105 PS	/	/	/	4	12
FIAT	Doblo Cargo '10	Doblo Cargo 1.6	263 A	02/2010	66 kW	90 PS	/	/	/	4	12

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com
© 2022 Shenzhen Shumatt Technology Co., Ltd

Website : www.shumatt.com



		Silei	iznen s	humatt	recn	Hology	CO.,	Llu			
	[263]	MultiJe t									
FIAT	Doblo Cargo '10 [263]	Doblo Cargo 1.6 MultiJe t	263 A3.00 0	02/2010	74 kW	100 PS	/	1	/	4	12
FIAT	Doblo Cargo '10 [263]	Doblo Cargo 1.6 MultiJe t	198 A3.00 0	02/2010	77 kW	105 PS	/	1	/	4	12
FIAT	Grand e Punto [199]	Grande Punto 1.6 MultiJe t	955 A3.00 0	08/2008 - 12/2009	88 kW	120 PS	/	1	/	4	12
FIAT	Idea [350]	Idea 1.6 MultiJe t	350 A	04/2008 - 12/2012	85- 88 kW	116- 120 PS	/	/	/	4	12
FIAT	Linea [323]	Linea 1.6 MultiJe t	198 A3.00 0	10/2008 - 12/2017	77 kW	105 PS	/	/	/	4	12
FIAT	Punto Evo [199]	Punto Evo 1.6 MultiJe t	955 A3.00 0	10/2009 - 12/2011	88 kW	120 PS	/	/	/	4	12
LANCIA	Delta [844]	Delta 1.6 MultiJe t	944 A3.00 0	04/2011 - 08/2014	77 kW	105 PS	/	/	/	4	12
LANCIA	Delta [844]	Delta 1.6 MultiJe t	844 A3.00 0	01/2014 - 08/2014	77 kW	105 PS	/	/	/	4	12
LANCIA	Delta [844]	Delta 1.6 MultiJe t	955 A4.00 0	07/2008 - 12/2014	85 kW	116 PS	/	/	/	4	12
LANCIA	Delta [844]	Delta 1.6 MultiJe t	198 A2.00 0	07/2008 - 12/2014	88 kW	120 PS	/	/	/	4	12
LANCIA	Musa [350]	Musa 1.6 MultiJe t	350 A3.00 0	09/2008 - 12/2012	85 kW	115 PS	/	1	/	4	12

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: <u>ruby@shumatt.com</u>

Website: <u>www.shumatt.com</u>



LANCIA	Musa [350]	Musa 1.6 MultiJe t	350 A2.00 0	10/2007 - 12/2012	88 kW	120 PS	/	/	/	4	12
OPEL	Combo [D]	Combo 1.6	A 16 FDL	02/2012	66 kW	90 PS	/	1	/	4	12
OPEL	Combo [D]	Combo 1.6		10/2015	70 kW	95 PS	/	1	/	4	12
OPEL	Combo [D]	Combo 1.6	A 16 FDH	02/2012	74 kW	101 PS	/	1	/	4	12
OPEL	Combo [D]	Combo 1.6	A 16 FDH	02/2012	77 kW	105 PS	/	1	/	4	12
OPEL	Combo [D]	Combo 1.6	•	03/2016	88 kW	120 PS	/	1	/	4	12
VAUXHAL L	Combo [D]	Combo 1.6	A 16 FDL	02/2012	66 kW	90 PS	/	1	/	4	12
VAUXHAL L	Combo [D]	Combo 1.6	A 16 FDH	02/2012	74 kW	101 PS	/	/	/	4	12
VAUXHAL L	Combo [D]	Combo 1.6	A 16 FDH	02/2012	77 kW	105 PS	/	/	/	4	12

1.4.0445110300 **Injector's Parameter**

Adaptation System: Common Rail System

Injector Series: 110 Series

Parameter Performance: CRI2-16

Matching Accessories: F 00V C17 504, gasket

Injector Type: Electromagnetic Injector
Support System Maximum Pressure: 1600

Vehicle Configuration Information: ALFA ROMEO/FIAT/LANCIA/OPEL/SUZUKI/VAUXHALL/GMC (GENERAL

MOTORS CORP.)

1.5.0445110300 Injector's Specifications and Dimensions

Injector Size: 21.5cm*4 cm *4 cm = 344cm³ (L*W*H=V)

Injector Net Weight: 0.55kg

Gross Weight: 0.6kg

Injector Quality: China Made Brand New

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com Website: www.shumatt.com

Package Size: 28cm*7 cm *7 cm = 1372 cm³ Injector Type: Diesel Common Rail Injector

MOQ: 4 Pieces

1.6. 0445110300 Injector's Quality Control

45

(1) Injector Testing

All injector spare parts are tested for electrical characteristics, accuracy, high temperature, low temperature, withstand voltage, leakage, durability, and various working conditions.

(2) Injector Assembling

And the quality control of the injector production and installation process, our company strictly follows the standard product installation data and product installation steps to install, such as injector stroke test, injector solenoid valve tightening torque, injector nozzle tightening torque,

(3) Injector Inspection

The factory inspection of the injector is undergone full inspection, random inspection, and batch inspection three inspections. Different brands of test benches are used to test the same fuel injector for a total of no less than three times for factory inspection, and the fuel injector installation testing environment are progressed in dust-free workshop.

1.7. 0445110300 Injector's Customized Service

(1) Injector's Customized Service: Meet the customized needs of OEM manufacturers for shell lettering, logo engraving, injector internal packaging, injector external packaging and labels customized, etc.



(2) Injector's Customized Service Requirements:

The purchased of customized injector are not less than 10 pieces.

Customized injector packages no less than 1000 pieces.

Customized products involve the need of specify logo, the OEM manufacturer needs to provide trademark authorization and the sample of logo image file.

▲ Once the customized fuel injector is sold, it cannot be returned or exchanged if there is no quality problems.

1.8.0445110300 Injector's Packing List and Package Size

(1) Injector Spare Parts List

No.	90° 90° 1	- 60	4000	-57/0-1	2	2370	2370	3 3	980
Image	Shum		<i>y</i>	51 ⁶³) 24 Jan	37 ⁵	0	3/8
Name	Fuel In	jector	40,000	400	O-Ring	SH	Ga	sket F 00V C17 5 0	03
Description	Fuel injector part num	ber: 0445110	0300	Ensure to me standard of t		d a		of brass, used to ens between the injector	

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com Website: www.shumatt.com



		0, ,	
No.	TO STATE OF THE PARTY OF THE PA	performance between the injector and the engine	and the engine
Image	TT 518 5182T	ett. Sett	57 ^{1,0}
Name	Nozzle Protective Cover Cap	Injector House Protective Cover Cap	Solenoid Valve Protective Cap
Description	Protect nozzle holes from being polluted and blocked	Protect oil inlet from being polluted and blocked	Protect the solenoid valve body and terminals from being damaged by external forces
No.	.7"	All Loal 8 Loal Loal	9
Strange Strange	2,000 .000 .000 .000	- 10 m	2400 - 2000 - 2000 - 2400
Image	2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	RIL.	5th 5th
-43	45	at at at at	
Name	VCI Anti-rust Bag	Bubble Bag	Injector Packing Box
Description	Prevent fuel injector from rusting	Prevent the injector from being damaged by external forces	Place injector and injector accessories

▲ Minors are forbidden to use the fuel injector assembly, O-ring, gasket, nozzle protective cover, fuel injector house protective cover, solenoid valve protective cover, VCI anti-rust bag, and air bubble bag to avoid personal injury.


▲ O-ring and gasket are disposable installation accessories, and need to be replaced for re-installation.

▲ The nozzle protective cover, the injector house protective cover, and the solenoid valve protective cover are recyclable accessories that can be reused.

▲ VCI anti-rust bags and bubble bags are non-degradable materials, please dispose of them properly after using.

▲ The injector and the installation parts should be coated with appropriate sealing oil during

(2) Injector Box Size

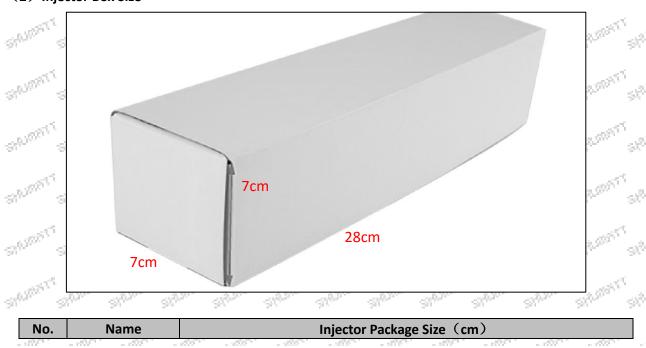

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com

© 2022 Shenzhen Shumatt Technology Co., Ltd

7/16

Website: www.shumatt.com

1 Injector Box 28*7*7

1.9.0445110300 Injector's Testing Standard and Certificate

We can provide the factory quality inspection test report of each injector to ensure that each injector delivered meets the engine performance indicators.



1.10.0445110300 Injector's Warranty Instructions

(1) . Product Warranty Conditions and Instructions

It is necessary to provide pictures, videos, or test reports detected by the injector inspection equipment when the injector is abnormal during use as evidence to feed back to the salesman.

Abnormal conditions are properly explained such as: 1.Smoke, 2. Engine shake, 3. Difficulty starting the engine, 4. Engine noise, 5. oil leakage etc.

(2) . Injector Warranty Coverage

Within 15 days after customer receives the 0445110300 injector, if there is a performance failure and the product has no appearance damage, customer can choose to replace it or repair it;

If the 0445110300 injector has performance problems during the warranty period (3 months), and it is confirmed that it is product's problems after testing, you can contact our salesmen to replace the same model or a reworked product with the same performance for free;

If the injector house has obvious scratches, it can only be repaired and it will be returned as it is if the product is confirmed to be fault-free.

▲ Tips: For products not covered by warranty, our company can provide paid maintenance services. For products after paid repaired, the same performance problem will have a free warranty period within 3 months from the date of repairing.

(3) . Injector Out of Warranty Coverage

The warranty period has expired.

Injector failure caused by high temperature, high pressure, humidity, rain and snow, saline-alkali land, earthquake, and used in abnormal environment.

Customer disassembles or repairs the injector personally resulting in damage to the injector.

Injector damage caused by man-made reasons (throwing, strong magnetic field magnetization, set fire).

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com Website: www.shumatt.com

Injector failure or injector damage caused by non-injector design, technology, manufacturing, quality and other issues.

Injector failure due to system pressure exceeding system approved pressure.

Injector failure caused by system voltage exceeding approved voltage.

Injector failure caused by impurities (water, lead, aluminum powder, iron powder, sulfide) in the system fuel exceeding the standard requirements.

Injector failure caused by not installing according to the tightening torque specified in the vehicle engine maintenance manual (the tightening torque is too large or too small).

Injector failure caused by not following the installation angle specified in the vehicle engine maintenance manual.

Injector failure caused by not following the cleaning requirements specified in the vehicle engine maintenance manual.

Injector failure caused by failure to replace consumable parts as specified in the vehicle engine maintenance manual.

Injector failure caused by not complying with the intake system fit clearance and exhaust system fit clearance requirements specified in the vehicle engine maintenance manual.

Failure to replace the consumable parts and the fitting clearance of the oil inlet system pipeline and the fuel injector connection in accordance with the fuel intake system specified in the vehicle engine maintenance manual.

1.11.0445110300 Injector's Manufacturer

Injector's manufacturer: Shenzhen Shumatt Technology Co., Ltd

2.0445110300 Injector Technical Support

2.1.0445110300 Injector's Part Number Location

1) E.g.: The injector part number see as follows




	No.	Name
ď,	ST A ST	brand, logo, part number, series number
	B at	nozzle part number


2.2.0445110300 Injector's Application Scenarios

Common rail system is an oil supply method refers to the diesel oil from the fuel tank sucked out by the gear pump through the oil-water separator and the gear pump to diesel fine filter, high-pressure pump, common rail pipe, and fuel injector, all together with the closed-loop fuel supply system composed of sensors and ECU that completely separates the generation of injection pressure and the injection process from each other.

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com Website: www.shumatt.com



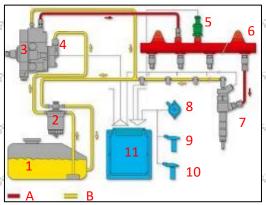

Pic No. 1

No.	Name	No.	Name	No.	Name	No.	Name
1	Tank	5	Common Rail Pressure Sensor	9	Engine Crankshaft Sensor	A.	High Pressure Oil Circuit
2	Diesel Filter	6	Common Rail Pipe	10	Camshaft Sensor	В	Low Pressure Oil Circuit
3	High-Pressure Pump	رة 7	Injector	11	ECU Electronic Control Unit	-offi	-10TE -10TE
-4	Fuel Gear Pump	8	Accelerator Pedal	California .			

2.3.0445110300 Injector's Installation

(1) .0445110300 Injector's Installation Precautions:

A The replacement of the fuel injector must strictly follow the electrical system, the approved pressure of the low-pressure fuel intake system, the approved pressure of the high-pressure fuel circuit system, and fuel system replacement consumables requirements (including the low-pressure fuel circuit system filter and the high-pressure fuel circuit) specified in the vehicle engine maintenance manual,

A Replacement of wearing parts of the fuel system, cleaning requirements for the connection between the fuel system and the injector, the fitting clearance of the fuel injector connection, the installation angle and tightening torque of the injector, the fitting clearance of the intake system, and the fitting clearance of the exhaust system to ensure the service life of the engine and the normal operation of the injector.

▲ When installing the fuel injector on the engine, it is necessary to clean the engine block, cylinder head and other parts connected to the fuel injector, and ensure that there is no dust, carbon deposits, water, rust spots, etc.

▲ Before installing, check whether the fuel injector nozzle gasket has been replaced and installed on the fuel injector.

▲ When installing the fuel injector, apply lubricant between the fuel injector, fuel nozzle sealing gasket and O-ring.

▲ Without replacing new gasket can lead to: deformation of the tight cap of nozzle, deformation of nozzle, deformation of nozzle orifice, oil leakage and air leakage, which will cause serious damage to the fuel injector and nozzle to break and cause damage to the engine.

▲ When installing the injector on the engine, please carefully check the components related to the installation of the injector, such as the injector pressure plate, screw, injector rod and other accessories are not deformed, and install it in strict accordance with the operation steps of the engine maintenance manual.

▲ It is forbidden to operate the bare injector for a long time in an environment with serious dust pollution and corrosion to iron products.

▲ It is forbidden to operate the bare injector for a long time in a strong magnetic field environment.

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com Website: www.shumatt.com



2.4. 0445110300 Injector 's Reasons for Not Working Normally

- (1) There is air in the oil circuit of the engine fuel system.
- (2) Vehicle oil pump oil supply system is not normal.
- (3) Engine common rail system oil leakage or pressure limiting valve damage.
- (4) There is a short circuit, cutting out and poor contact in the wiring harness connected to the fuel injector of the vehicle.
- (5) The long-term placement of the injector causes the anti-rust oil to solidify, and the internal components are stuck or the oil holes are blocked.
- ▲ Before installing, carefully check whether other components in the common rail system except the fuel injector are damaged so as to prevent the fuel injector from not working properly after being replaced.

2.5. 0445110300 Injector 's Causes of Damage

- (1) Didn't operate properly according to engine maintenance manual during disassembly or installation, resulting in damage to the injector .
- (2) The fuel oil used for the vehicle does not meet the standard cause damage to the injector, such as: the water content in the fuel oil exceeds the standard, iron powder, aluminum powder, sulfide impurities exceed the standard, etc.
- (3) The engine is not regularly maintained according to the engine maintenance manual (please refer to the vehicle maintenance manual for the maintenance mileage). For example, failure to replace the lubricating oil of the engine system for a long time will cause abnormal wear of the engine, excessive exhaust gas volume or a large amount of carbon deposits inside the engine. The filter is not replaced during maintenance or the replaced filter cannot reach the original filter standard. all above reasons can cause damage to the injector.
- (4) The abrasion of the oil pump produces iron powder and aluminum powder enter the fuel injector and cause damage to the fuel injector.
- (5) The deformation and abrasion of fuel tank result in iron powder or aluminum powder entering the fuel injector and causing damage to the fuel injector.
- (6) The fuel injector is damaged due to replacement or adjustment of the relevant parts of the fuel injector. For example, the valve clearance does not meet the standard after the engine is repaired, the replacement or modification of the wiring harness connected to the injector fails to meet the original standard.
- (7) The engine is overheated and overloaded for a long time working results in damage to the fuel injector.
- (8) The injector will be damaged naturally at the end of its working life.
- (9) The injector is magnetized (injector parts' magnetic exceeded) causing the injector to not work properly.
- A Before replacing the fuel injector, please check the engine parts carefully according to the engine maintenance manual to avoid the fuel injector being damaged again after replacement.

2.6.0445110300 Injector's Technical Support Obtaining Methods

- (1) Injector Technical File, visit http://shumatt.com to get the technical file.
- (2) Injector Technical Videos

Facebook: Visit https://www.facebook.com/hison.li to get the technical videos, constantly follow can get more information.

YouTube: https://www.youtube.com/channel/UCByvYBx7VjV mAfxh Hu-aw to get the technical videos, constantly follow can get more information.

Shumatt: Visit http://shumatt.com to get the technical videos.

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com Website: www.shumatt.com



and and

Shenzhen Shumatt Technology Co., Ltd

(3) Injector Information Query Software

TruckBook Parts EPC APP, Android/Apple App Store download and install, visit http://shumatt.com to get the download and installation tutorial

(4) Search The fuel injector test data through TruckBook Parts EPC APP.

3.0445110300 Injector's Purchase and Delivery

3.1.0445110300 Injector's Purchase Payment Term

Payment Terms: T/T, PayPal, Alipay, WeChat

Please contact our salesmen for specific payment information.

3.2.0445110300 Injector's Main Sales Markets

Injector main sales markets: Asia, Europe, North America, South America, Africa etc.

3.3.0445110300 Injector's Declaration Requirements

Shumatt can assist customers to provide the following documents for import customs clearance: contract, invoice, packing list, bill of lading, insurance policy, certificate of origin, etc.

3.4.0445110300 Injector's Shipping Ways

Destination in China areas: SF Express, Debon Express, the corresponding logistics company can be provided according to customer requirements in special cases.

Destinations out of China's areas: DHL, UPS, FedEx, TNT air, ocean or other shipping methods required by customers.

3.5.0445110300 Injector's Lead time

Lead time: Send out within 3-7 working days after receiving payment (Except for special products and special cases).

3.6.0445110300 Injector's Logistics Time for Destination Out of China's Areas

DHL Logistics Time:

Country or Region of Departure	Hong Kong, China	Other Countries or Regions of Asia	Australia and New Zealand	Europe	America	Other Countries
China's Mainland	7 Days	7 Days	8 Days	8 Days	8-12 Days	7-10 Days

UPS Logistics Time: Country or Region of Departure: China's Mainland

Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time	Country of Destination	Estimated Arrival Time
Japan	3 Days	UK	5-7Days	Egypt	5-7 Days
Turkey	5-7 Days	Singapore	3 Days	Switzerland	5-7 Days
Bahrain	5-7 Days	Latvia	7-10 Days	New Zealand	7-10 Days
Sri Lanka	5-7 Days	Thailand	3 Days	Austria	5-7 Days
Romania	5-7 Days	Vietnam	3-5 Days	Estonia	5-7 Days
Malaysia	3-5 Days	Israel	5-7 Days	Mexico	7-10 Days
France	5-7 Days	America	5-7 Days	United Arab Emirates	5-7 Days
Italy	5-7 Days	Netherlands	5-7 Days	Bengal	7-10 Days

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com Website: www.shumatt.com

Lebanon	5-7 Days	Philippine	3-5 Days	Greece	7-10 Days
South Korea	3 Days	Spain	5-7 Days	Myanmar	5-7 Days
Canada	5-7 Days	Germany	5-7 Days	Saudi Arabia	7-10 Days
Portugal	5-7 Days	Australia	5-7 Days	South Africa	7-10 Days
Denmark	5-7 Days	Belgium	5-7 Days	Ukraine	7-10 Days
India	7-10 Days	Qatar	7-10 Days	Poland	5-7 Days
Indonesia	3-5 Days	Morocco	7-10 Days	Pakistan	7-10 Days
Kuwait	7-10 Days	720 The 1720	Sec. Page	1 200	27s. 27s

The logistics time is for reference only, subjects are according to the actual arrival.

3.7.0445110300 Injector's Packing

Domestic express packaging: Usually wrapped in waterproof scotch tape, such as picture No.2.

International express packaging: Wrapped with waterproof yellow tape After wrapping the black protective film, such as picture No. 3.

Pallet Shipping: Use fumigation free and recycling trays that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties for the outside, such as picture No. 4, also, the products can be packaged according to customers' requirements.

▲ The packing tray is made of plastic and can be recycled.

▲ Transparent tape, yellow tape, black wrapping protective film, white wrapping protective film are non-degradable materials, please dispose of them properly.

Minors are prohibited from using transparent tape, yellow tape, black wrapping protective film, and white wrapping protective film to avoid personal injury.



Pic No. 2 Domestic express packaging:

Wrapped with Transparent tape



Pic No. 3

International express packaging:

Wrapped with yellow tape after wrapping black protective film

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com Website: www.shumatt.com





Pic No. 4

Pallet Shipping: Use pallet that meet export requirements, and use white wrapping protective film to wrap and bind with cable ties

4.0445110300 Injector's Storage Standard

(1) Choose a suitable storage place

The warehouse and cargo yard where the fuel injector is stored should be kept clean and dry, and away from the factory buildings that generate harmful gases and dust; do not mix with acid, alkali, salt and other substances; the storage place should have a good drainage system; the cargo yard should be flattened with gravel or furnace ash etc. to enhance the water permeability of the surface layer to keep the reservoir area

(2) Strict requirements of warehousing

Strict inspections should be carried out when the fuel injectors are put into storage, the surface cleaning work should be done well to remove water traces, oil stains, ash and other dirt, remove the rust and do antirust treatment in time. Packaged injectors must be protected from damage.

(3) Keep the warehouse dry and preventing moisture

The relative humidity is usually below 70% for the fuel injectors placed in the room, and the corrosion of the fuel injectors is significantly reduced.

Injectors must be stored in the warehouse, and they are forbidden to store in the same warehouse with commodities with high water content.

(4) Stack Properly

After the injector is exposed to rain, the corrosion rate will increase significantly. The purpose of sealing is to isolate the injector from rainwater and humid air, so the warehouse window should be checked in time to avoid rainwater entering the warehouse Black.

If the fuel injector package is damaged, it should be repaired or replaced; when the package is damp, the packaging material should be dried; if the original anti-corrosion and oil applied at the factory is found to be damaged or dried up, it should be cleaned and re-applied oil in time.

▲ It is forbidden to leave the injector exposed in the air for a long time.

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com Website: www.shumatt.com

- It is forbidden to store acid, alkali, salt and other substances together with the injector.
- The unpacked fuel injector must be rust-proof during secondary storage.

5. Company Information



5.1. Company Introduction

Chinese Name: 深圳市舒马特科技有限公司

English Name: Shenzhen Shumatt Technology Co., Ltd

Mob Phone/WeChat: +86-13410541523

☐ **HK Telephone**: +852-67653519

Telephone: +86-755-23215133

Email: ruby@shumatt.com

Website: www.shumatt.net

Shenzhen Office: 11-12, Floor 14, Building 13, Qinchengda Building, Exit A, Honglang North Subway Station, Bao'an District, Shenzhen, China's Mainland

Shenzhen Office: Room 428-430, Building B, Huafeng Zhigu Technology Industrial Park, Exit B, Fuyong Metro Station, Bao'an District, Shenzhen, China's Mainland . Mar Mar Mar Mar

AND THE PARTY OF T

Hong Kong Office: Jianfa Street Industrial Zone, Tuen Mun, New Territories, Hong Kong, China

Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com

© 2022 Shenzhen Shumatt Technology Co., Ltd

15 / 16

Website: www.shumatt.com

After-sales Service Address: Please contact our salesmen to obtain and provide the corresponding product maintenance reasons (Reference: 1.10.0445110300 Injector Warranty Instructions)

5.2. Sales-men's Contact Information

No.	Name	WeChat/WhatsApp	Email	Facebook	YouTube
1	Ruby	+86-13410541523	ruby@shumatt.com	Hison Li	Hison Li
2, 200	Lvy 3000	+86-18025299821	sales@shumatt.com	Ivy Shumatt	Shumatt IVY
3	Rebecca	+86-18025349821	sales01@shumatt.com	Rebecca SHUMATT	SHUMATT Rebecca
4	Janny	+86-18028749821	sales02@shumatt.com	Janny shumatt	Janny Shumatt
5.	Sam	+86-13316859821	Sales8@shumatt.com	Shumatt Sam	Sam Shumatt
6	Natalie	+86- 18938945856	sales15@shumatt.com	Shumatt Natalie	Lin Natalie
7	Ada	+86-1342286353	sales5@shumatt.com	Shumatt Ada	Ada Shumatt
8	Hison Li	+86-18318811871	web@shumatt.com	Hison Li	Hison Li
9	Mecca	+86-18938948618	sales11@shumatt.com	Shumatt Mecca	Shumatt Mecca
10	Eric	+86 18319033618	sales3@shumatt.com	3	
11	Wayne (Joaquín en español)	+86-13316959821	wayne@shumatt.com	shumattwayne	Wayne Shumatt
12	Sylvia	+86 18312499884	sales6@shumatt.com	Show Show	Store Store
-		Visit http://shumatt.com to ob	tain the latest information of sales-m	en	
		PS Shumatt's sales-men's e	mails are all end with @shumatt.com		

6. Copyright Statement

The copyright of any contents (including but not limited to parameters, data, text, charts, images, sounds or videos, etc.) provided in "0445110300 *Injector CRI2-16 Technical File*" belong to Shenzhen Shumatt Technology Co., Ltd. Without the prior written permission of Shenzhen Shumatt Technology Co., Ltd., you are not allowed to modify any contents in "0445110300 *Injector CRI2-16 Technical File*" in any way. At the same time, any conditions to spread, re-post, display the contents of "0445110300 *Injector CRI2-16Technical File*" should indicate that the cited article is from Shenzhen Shumatt Technology Co., Ltd., Any actions failure to follow above conditions to use "0445110300 *Injector CRI2-16 Technical File*" will violate the "Copyright Law of the People's Republic of China" and other laws and regulations and the provisions of relevant international conventions.



Mob/WhatsApp: +86 13410541523 Tel: +8675523215133

Email: ruby@shumatt.com

© 2022 Shenzhen Shumatt Technology Co., Ltd

Website: www.shumatt.com